

Micsig Accessories

Oscilloscope Handbag
 High Voltage passive probe
 Isolate passive probe
 passive probe
 Secondary ignition pickup
 Test leads
 Multimeter pen
 Insulated alligator clips
 Fine copper test alligator clips
 Pincer clips
 Multimeter probes
 Quick piercing test hook needle
 Non-destructive piercing needle
 Insulation test needle
 Flexible piercing needle
 Carry Strap
 Delta power adapter
 BNC 90 degree connector
 Screen protector film

Model: MS_handbag
Oscilloscope Handbag



- Material: Nylon
- Plush, quilted front pocket for storing accessories, manuals, etc.
 - Wide-mouth opening with zipper-closure ensures easy accessibility.
 - Flexible bag accommodates a range of equipment types.
 - Fits all Micsig oscilloscope series.

Model: P130A
passive probe



- Bandwidth: 200MHz
- Attenuation ratio: x10
- Input capacitance: 14.5pF ~ 17.5pF
- Compensation range: 5pF ~ 30pF
- Lead length: about 130cm
- Input impedance: 10M Ohm
- Input voltage: less than 600V pk

Model: MS_A_008
Secondary ignition pickup



- capacitive with BNC
- Output Type: X10000 Auto Ignition Probe

Model: MS_A_001
Test leads



- BNC to banana: 3 kinds of length, 1.3M/3M/5M
- BNC to BNC: 1.6M

Model: MS_A_010
Multimeter pen



- Color: Grey
- Color of the Wire: Black + Red
- Material: Nickel Brass + Insulated Rubber
- Max Current: 10A
- Max Voltage: 1000V
- Wire length: Approx 120cm

Model: T3100
High Voltage passive probe




- Bandwidth: 10X: DC-100MHz
- Attenuation ratio: 100X
- Input capacitance: 100X: 18.5pF~22.5pF
- Compensation range: 15pF~45pF
- Lead length: 120cm
- Input impedance: 100M ohm
- input voltage: 100X: 2KV DC+ AC Vp-p

Model: MS_A_002
Isolate passive probe



- Brand: MULTI CONTACT
- Bandwidth: 250MHz
- Attenuation ratio: X10
- Input capacitance: 16 pF
- Compensation range: 10 pF-35 pF
- Lead length: 120cm
- Input impedance: 10MΩ±1%
- Input voltage: Max. 1000 V, CAT II (600V, CAT III)


Model: MS_A_006
Insulated alligator clips

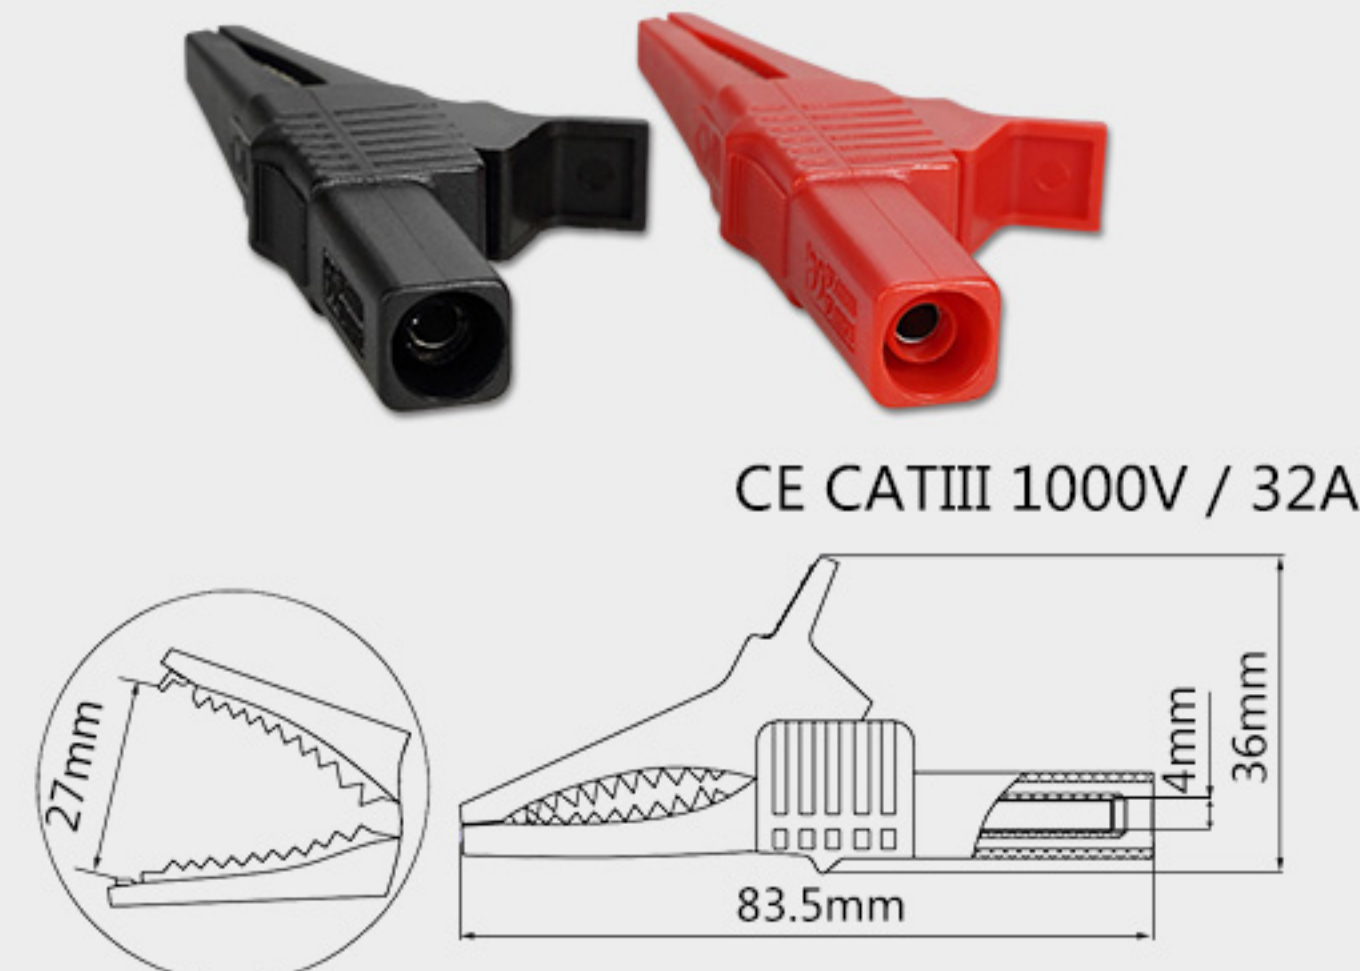


Model: MS_A_011
Fine copper test alligator clips



Model:MS_A_004
Pincer clips

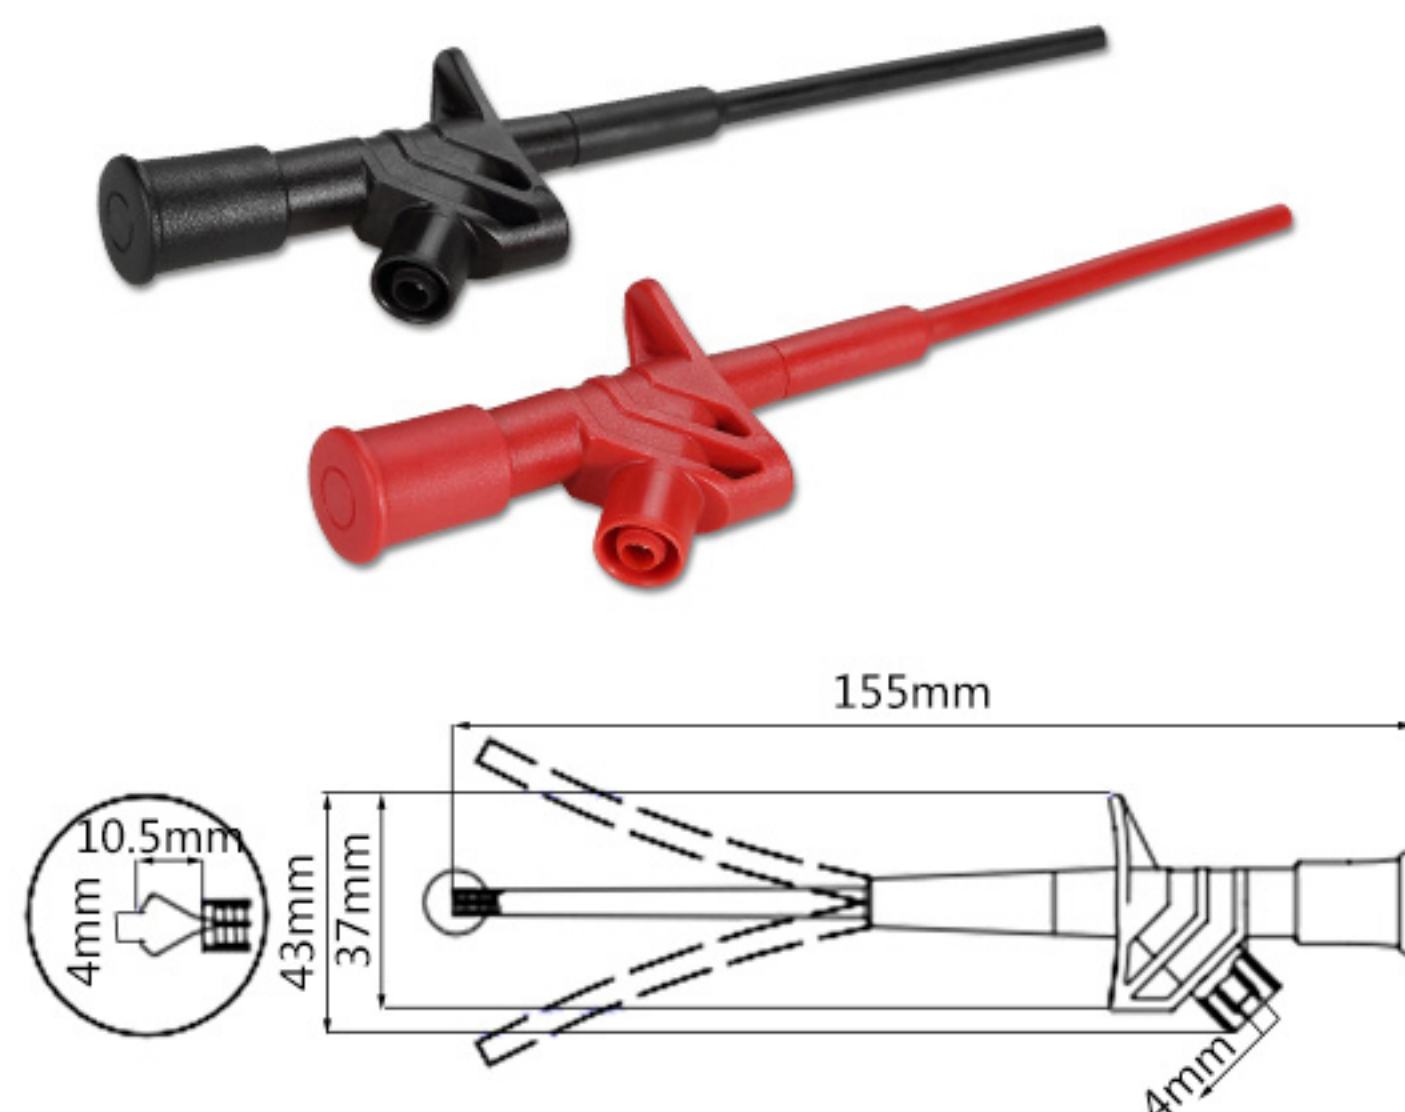

Model:MS_A_005
Multimeter probes

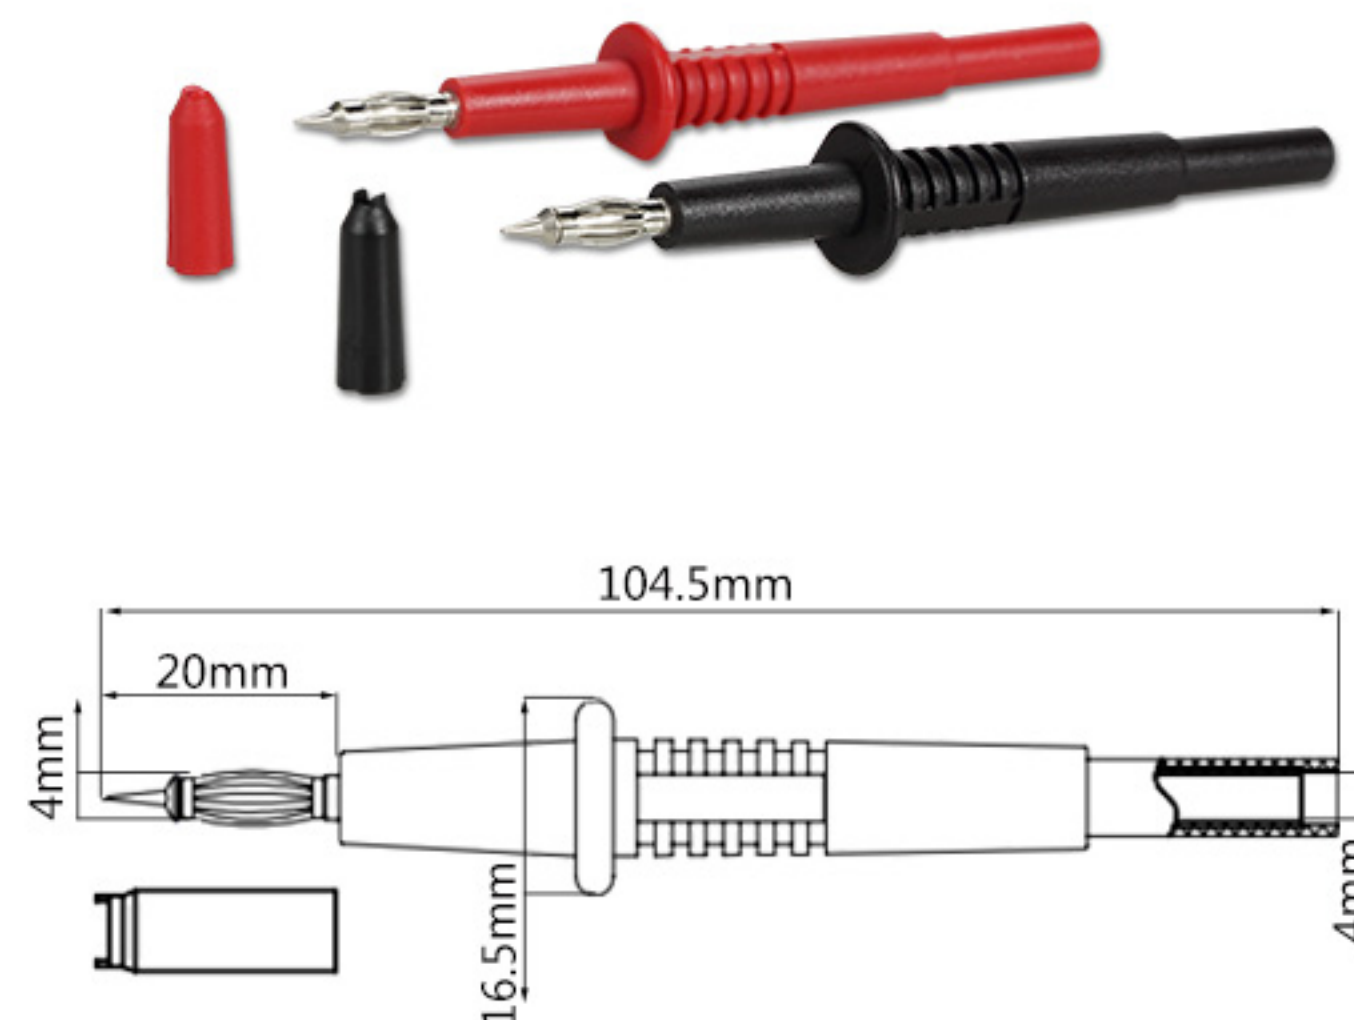

Model:MS_Belt
Carry Strap



Material: Genuine Leather

Model:MS_adaptor
Delta power adaptor




Brand: Delta
Output voltage / current: 12V/5A

Model:MS_A_012
Quick piercing test hook needle



Model:MS_A_007
Non-destructive piercing needle

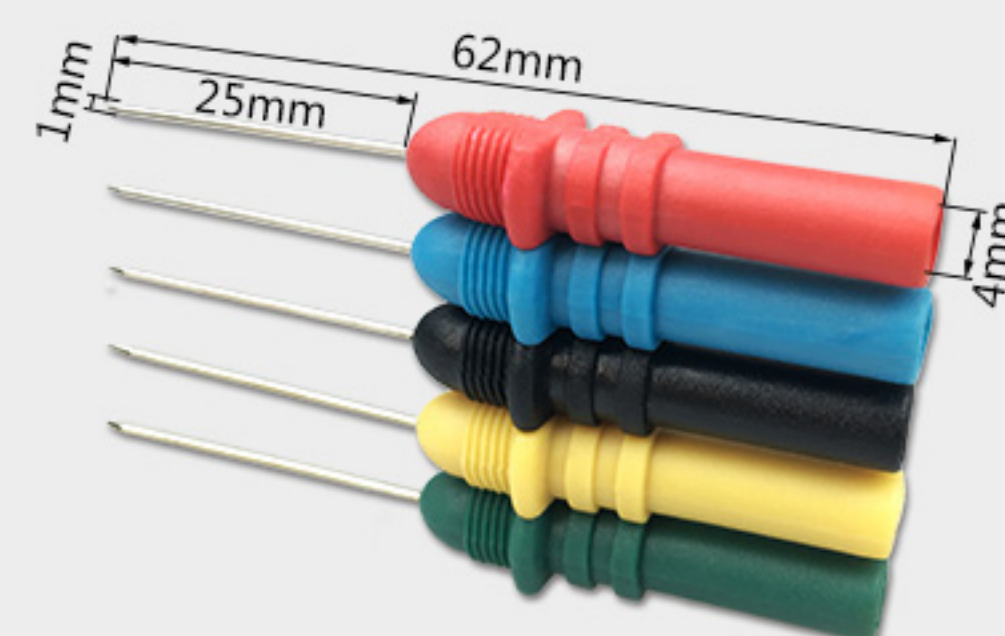

Model: MS-A-013
BNC 90 degree coonector




Model:MS_mask
Screen protector film




Specifically designed for Micsig TO1000 series (8.0 inches) completely covering the flat screen, ultra-clear with 99.9% transparency to allow an optimal, natural viewing experience.

Model:MS_A_003
Insulation test needle

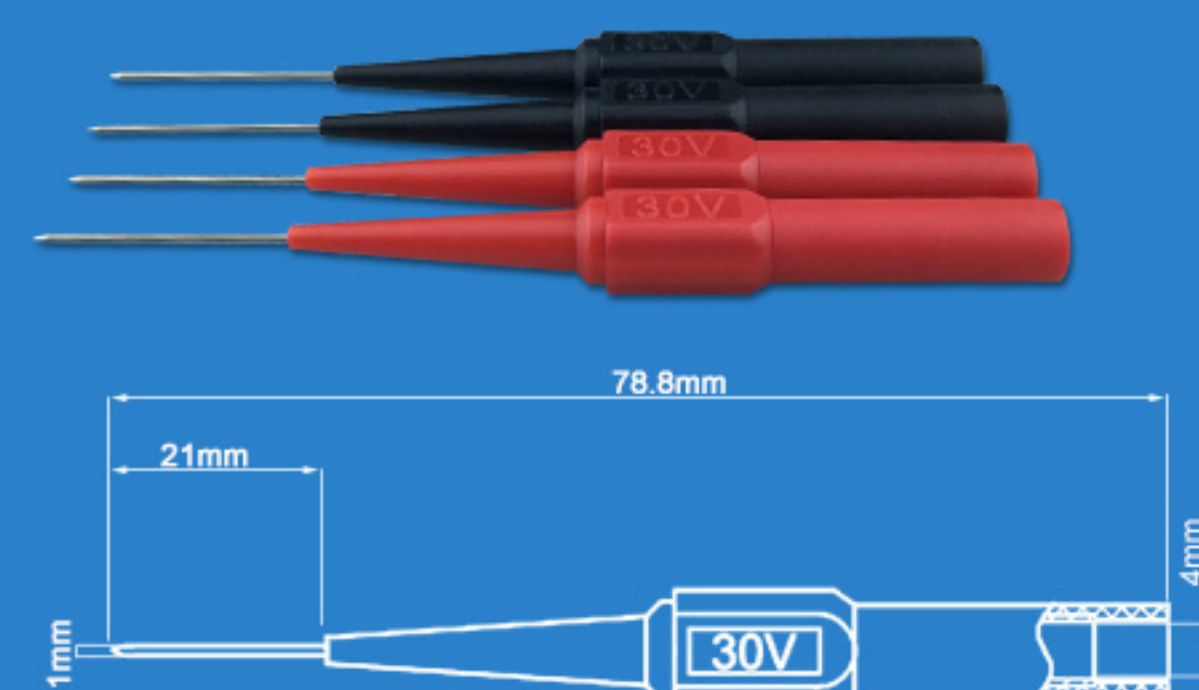

- Material: Plastic insulation, brass nickle and stainless steel
- Compliance: 30Vac-60Vdc/Max.10A
- Aperture Diameter: 4mm
- Needle Length: 21mm

Model:MS_A_009
Flexible piercing needle

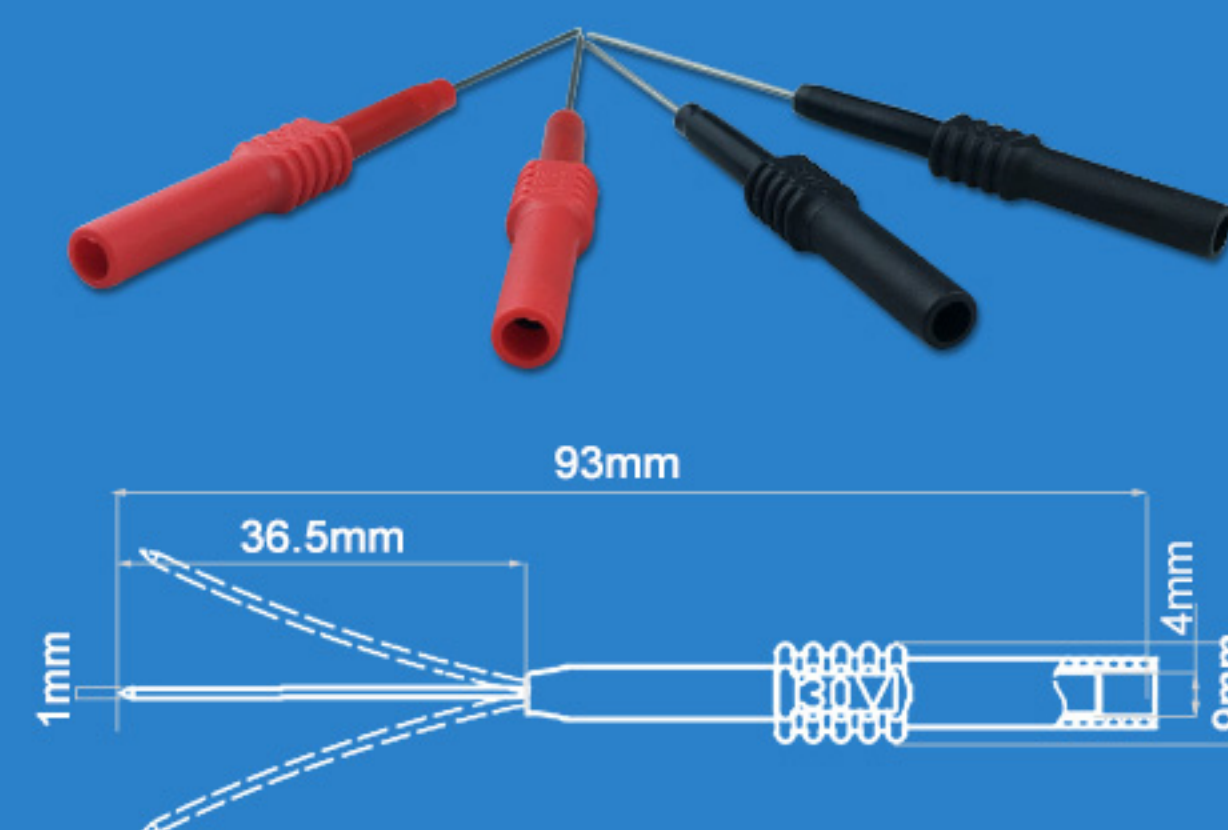

- Material: Plastic insulation, brass nickle and stainless steel
- Compliance: 30Vac-60Vdc/Max.10A
- Aperture Diameter: 4mm

Micsig

Shenzhen Micsig Instruments Co.,Ltd.

Add: 305 Block A, CLOU Building, Baoshen RD, North Area, Nanshan Science&Technology Park, Shenzhen, Guangdong,China.

Tel: +86-755-86-88600880

Fax: +86-755-26078507-818

Web: www.micsig.com

E-mail: sales@micsig.com

